


ITALGROUP SRL
IAM SERIES - IAM H3
GENERAL CATALOGUE

INDEX - IAM H3

<u>IAM H3 - INSTALLATION DRAWING</u>	Pag	72 - 73
<u>IAM H3/C - INSTALLATION DRAWING</u>	"	74 - 75
<u>IAM H3/B30 - INSTALLATION DRAWING</u>	"	76 - 77
<u>IAM 800 H3 - INSTALLATION DRAWING</u>	"	78 - 79
<u>IAM 800/N H3 - INSTALLATION DRAWING</u>	"	80 - 81
<u>IAM H3/GM3 - INSTALLATION DRAWING</u>	"	82 - 83
<u>IAM H3/S - INSTALLATION DRAWING</u>	"	84 - 85
<u>IAM H3 - PERFORMANCE DRAWINGS</u>	"	86 - 90
<u>IAM H3 - ORDERING CODE</u>	"	91

INSTALLATION DRAWING

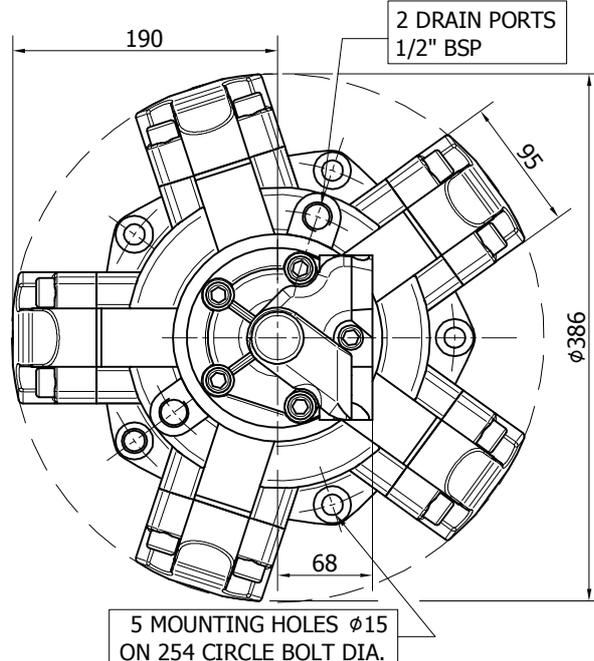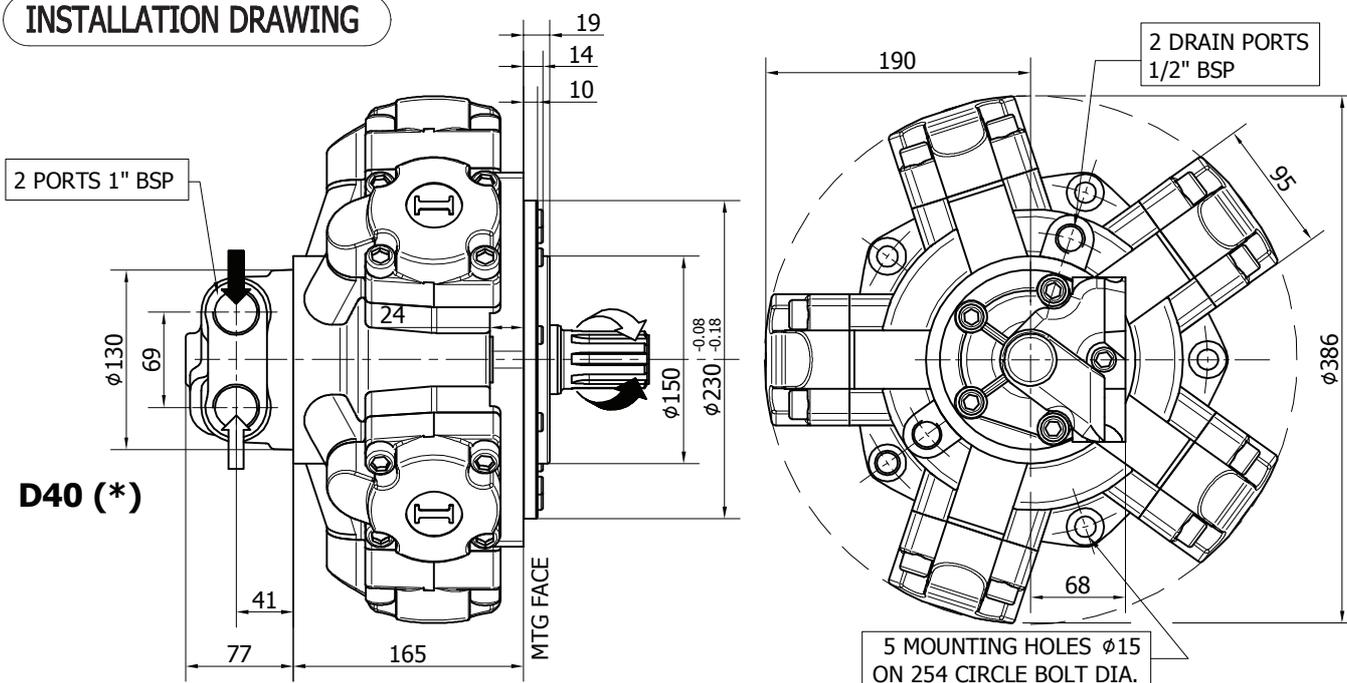


TECHNICAL DATA

		350 (*****)	400	450	500	600	650	700
DISPLACEMENT	[cc]	349	397	452	491	594	660	707
SPECIFIC TORQUE	[Nm/bar]	5.6	6.3	7.2	7.8	9.4	10.5	11.2
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250	250
HYDROSTATIC TEST PRES- SURE	[bar]	420	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	630	600	600	600	550	500	450
PEAK SPEED (***)	[rpm]	700	680	680	680	630	580	500
MAX. CONT. POWER (****)	[kW]	45	45	45	45	45	45	45
MAX. POWER	[kW]	68	68	68	68	68	68	68
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6	6
DRY WEIGHT	[kg]	68	68	68	68	68	68	68
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70


- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.
- (*****) Only A0 shaft is available for 350 cc displacement.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

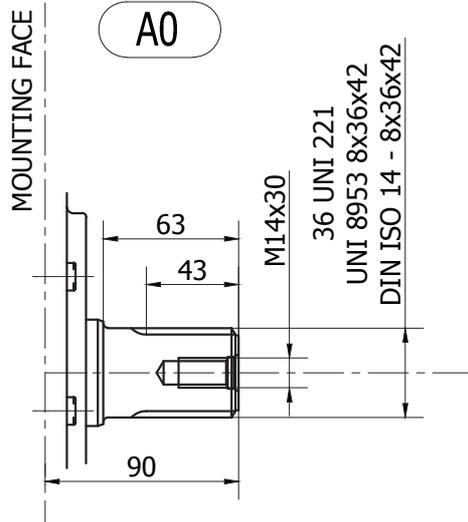

Available spline billet: **SB3**

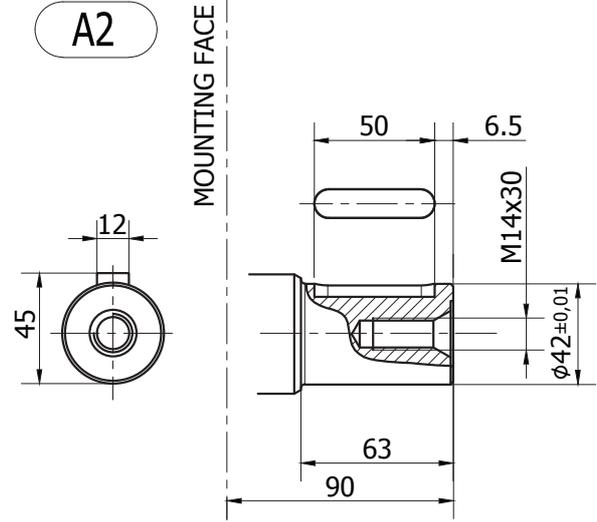


A3

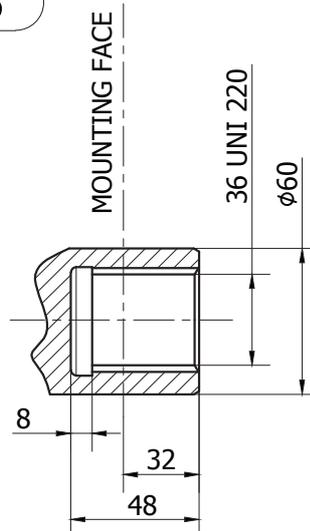

INSTALLATION DRAWING

Available distributor flange: **FL2**
refer to page 184 (distributor fitting D47)

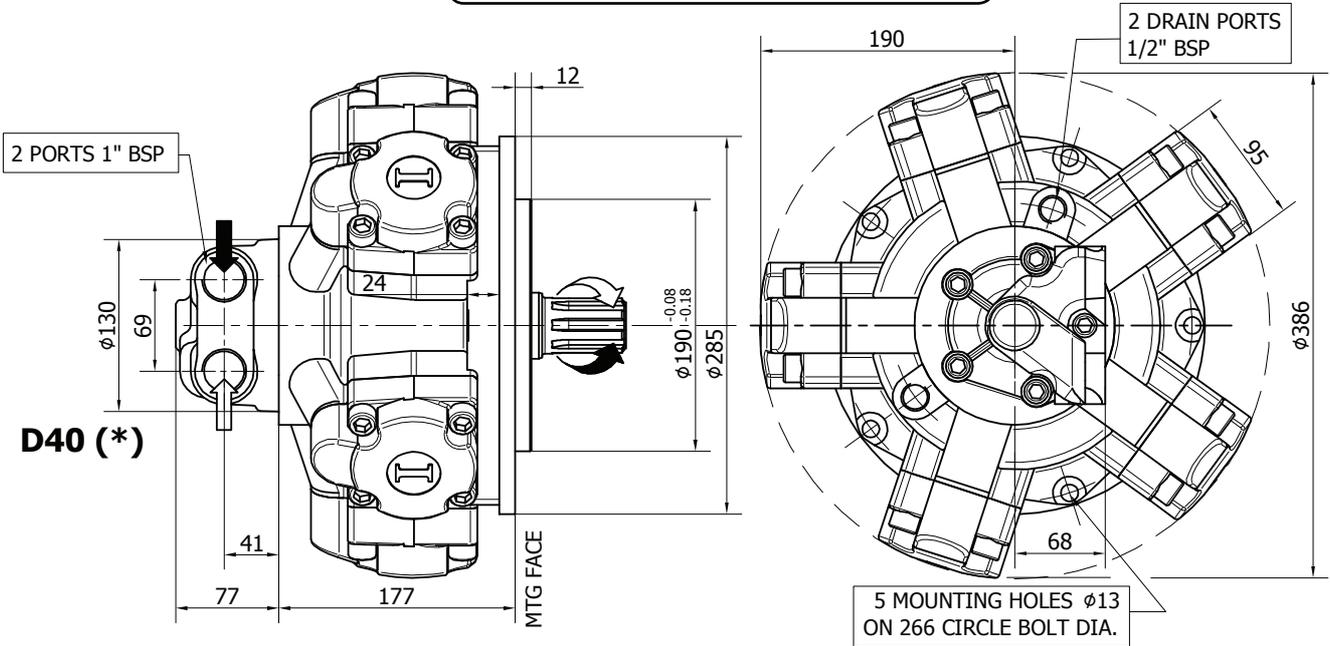

TECHNICAL DATA


		400	450	500	600	650	700
DISPLACEMENT	[cc]	397	452	491	594	660	707
SPECIFIC TORQUE	[Nm/bar]	6.3	7.2	7.8	9.4	10.5	11.2
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	600	600	600	550	500	450
PEAK SPEED (***)	[rpm]	680	680	680	630	580	500
MAX. CONT. POWER (****)	[kW]	45	45	45	45	45	45
MAX. POWER	[kW]	68	68	68	68	68	68
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6
DRY WEIGHT	[kg]	68	68	68	68	68	68
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

SHAFT CONFIGURATIONS


A1

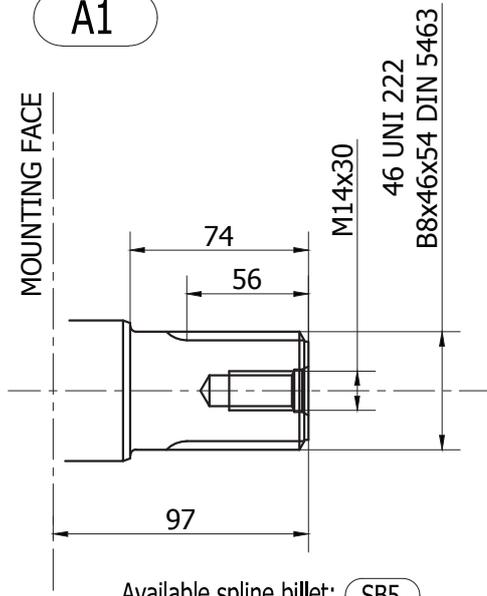


A11

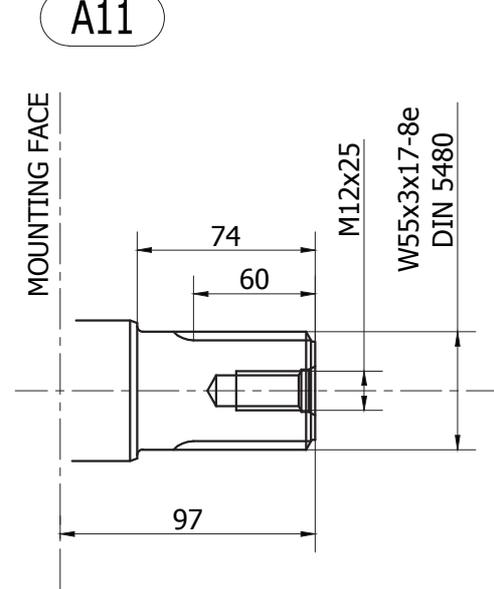

A2

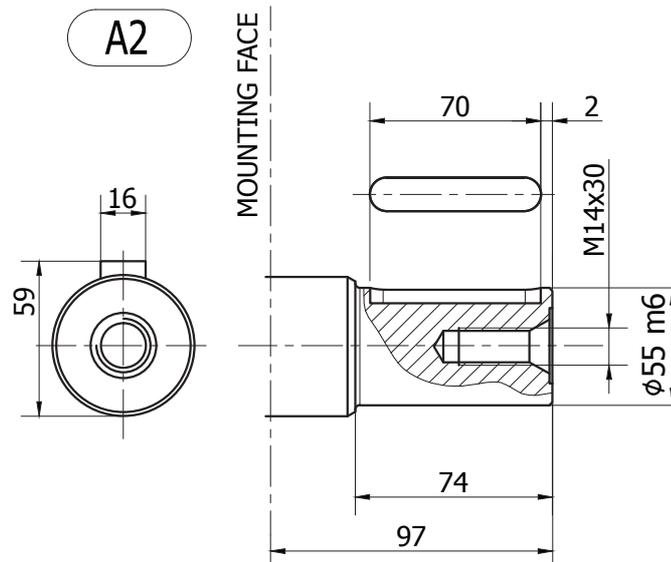

INSTALLATION DRAWING

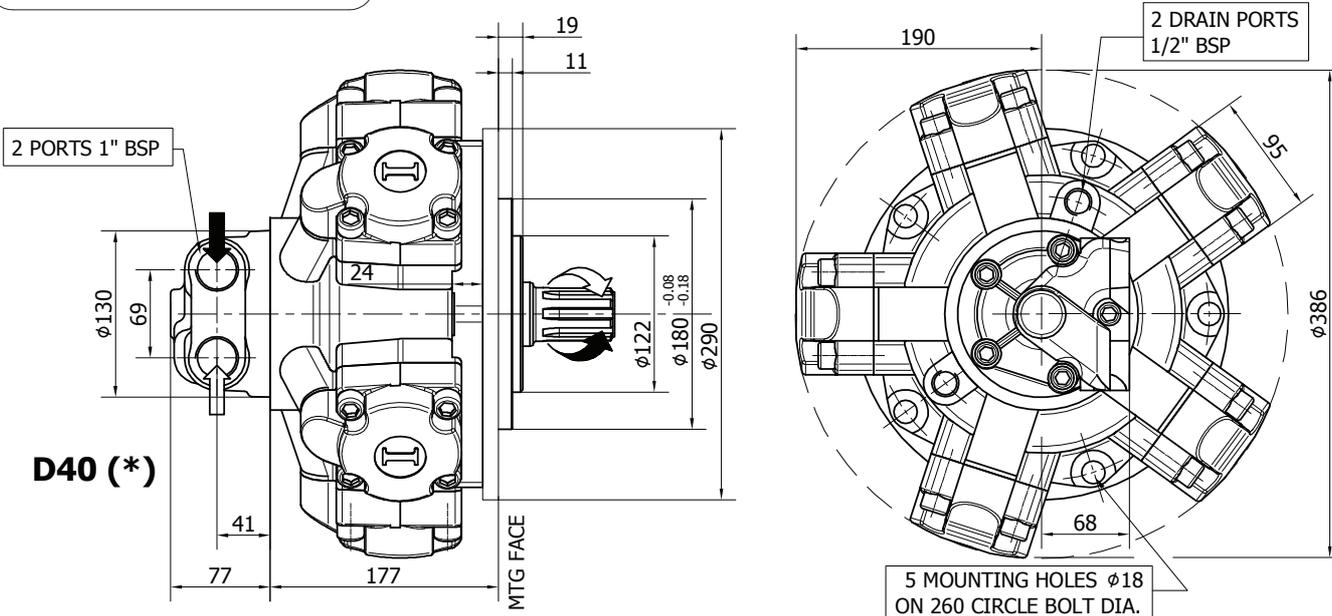





TECHNICAL DATA

		400	450	500	600	650	700
DISPLACEMENT	[cc]	397	452	491	594	660	707
SPECIFIC TORQUE	[Nm/bar]	6.3	7.2	7.8	9.4	10.5	11.2
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250
HYDROSTATIC TEST PRES-SURE	[bar]	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	600	600	600	550	500	450
PEAK SPEED (***)	[rpm]	680	680	680	630	580	500
MAX. CONT. POWER (****)	[kW]	45	45	45	45	45	45
MAX. POWER	[kW]	68	68	68	68	68	68
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6
DRY WEIGHT	[kg]	68	68	68	68	68	68
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70


- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

SHAFT CONFIGURATIONS

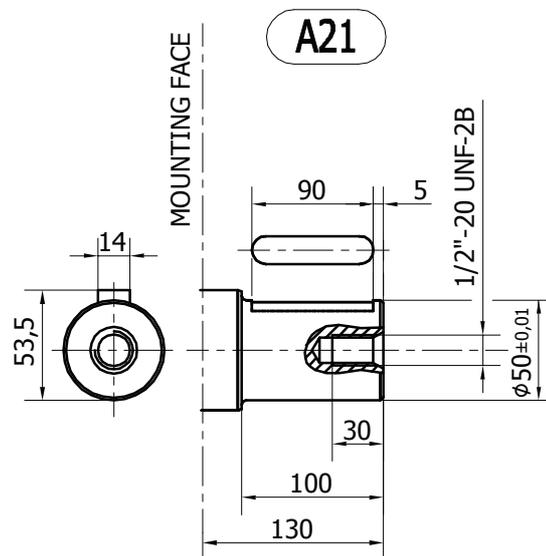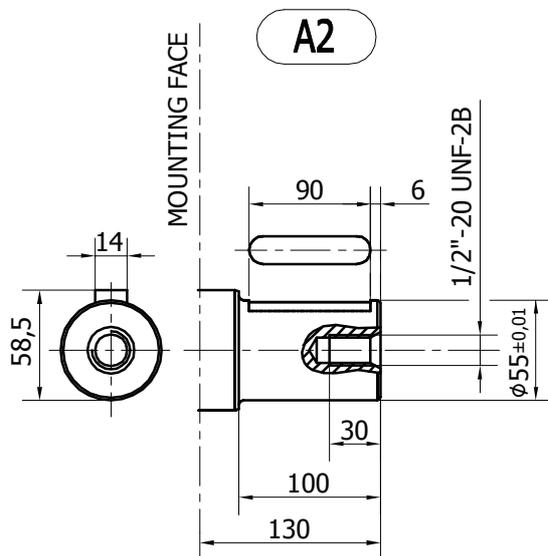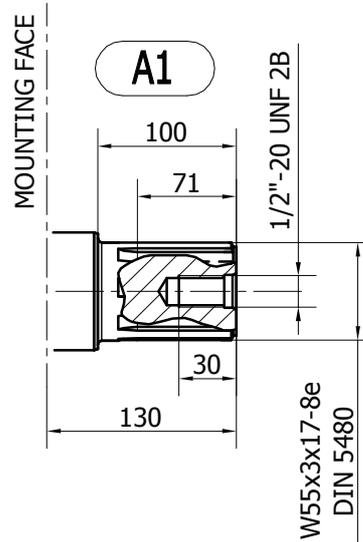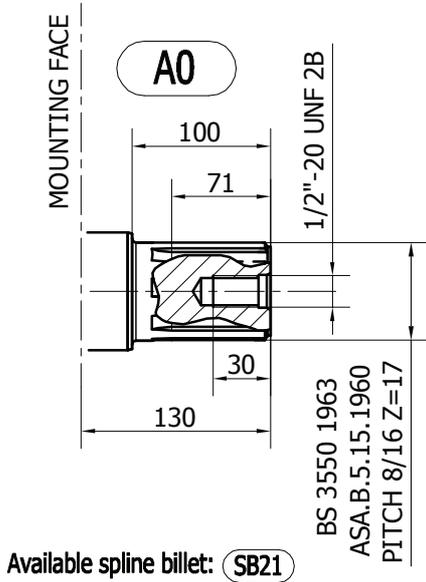

INSTALLATION DRAWING

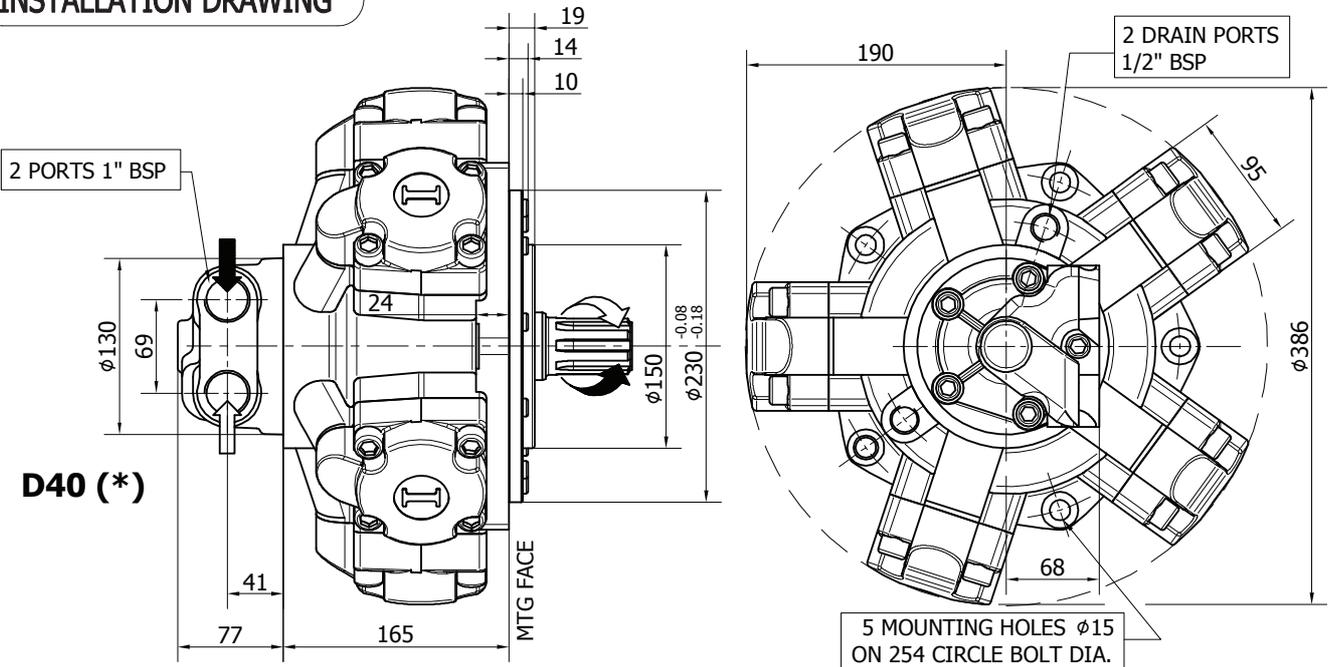


TECHNICAL DATA

		800 (*****)
DISPLACEMENT	[cc]	791
SPECIFIC TORQUE	[Nm/bar]	12.6
MAX. CONT. PRESSURE	[bar]	250
HYDROSTATIC TEST PRESSURE	[bar]	420
MAX. CONT. SPEED	[rpm]	400
PEAK SPEED (***)	[rpm]	450
MAX. CONT. POWER (****)	[kW]	45
MAX. POWER	[kW]	68
MAX. CASE PRESSURE	[bar]	6
DRY WEIGHT	[kg]	68
TEMPERATURE RANGE (**)	[°C]	-30÷70


- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.
- (*****) Only for spare parts market. Please contact our technical department for more details.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.




SHAFT CONFIGURATIONS

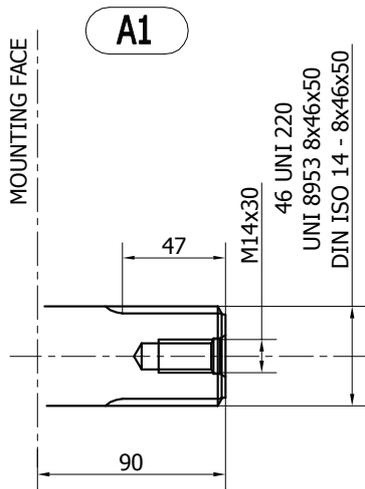

Available spline billet: **SB4**

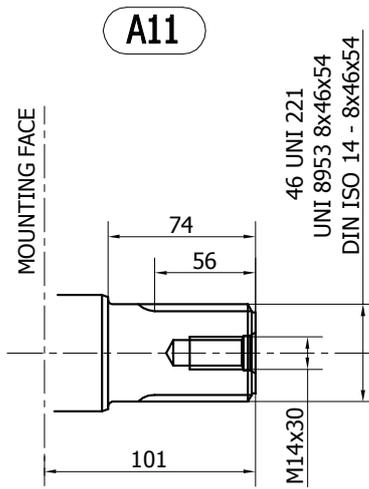


Available spline billet: **SB5**

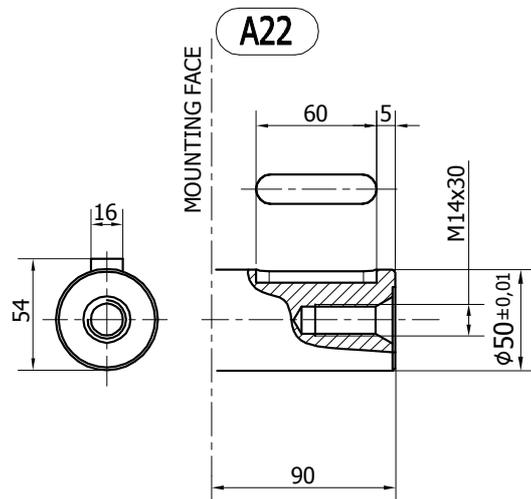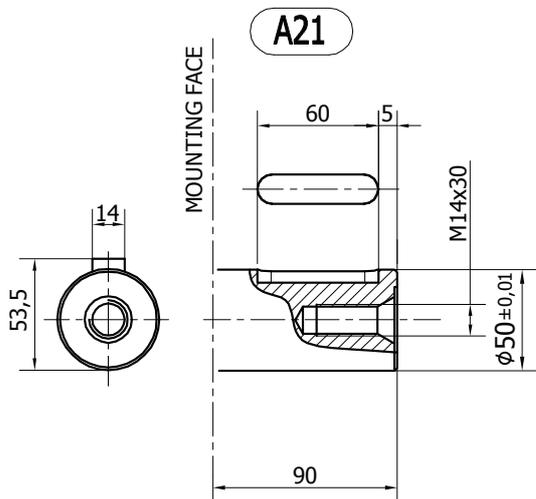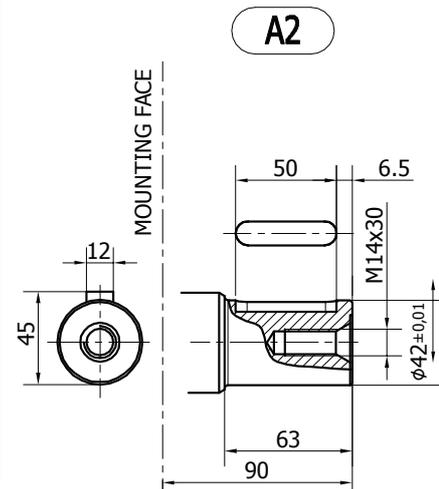

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

INSTALLATION DRAWING

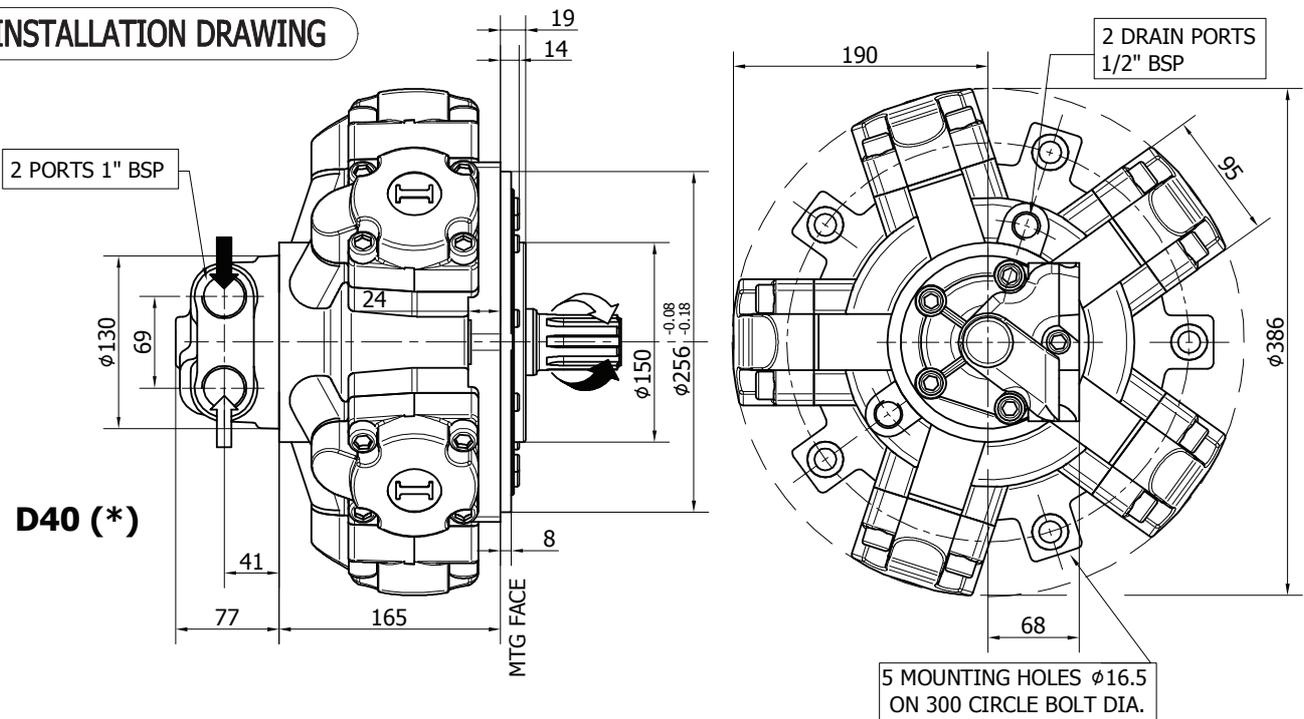


TECHNICAL DATA

		800 (*****)
DISPLACEMENT	[cc]	791
SPECIFIC TORQUE	[Nm/bar]	12.6
MAX. CONT. PRESSURE	[bar]	250
HYDROSTATIC TEST PRES- SURE	[bar]	420
MAX. CONT. SPEED	[rpm]	400
PEAK SPEED (***)	[rpm]	450
MAX. CONT. POWER (****)	[kW]	45
MAX. POWER	[kW]	68
MAX. CASE PRESSURE	[bar]	6
DRY WEIGHT	[kg]	68
TEMPERATURE RANGE (**)	[°C]	-30÷70


- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.
- (*****) Only for spare parts market. Please contact our technical department for more details.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.




SHAFT CONFIGURATIONS

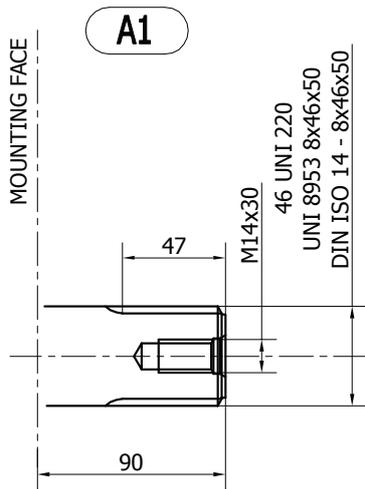

Available spline billet: **SB4**

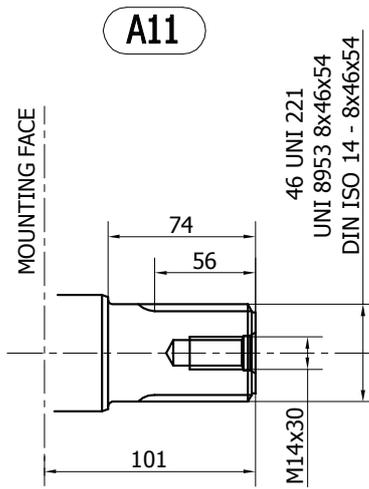


Available spline billet: **SB5**

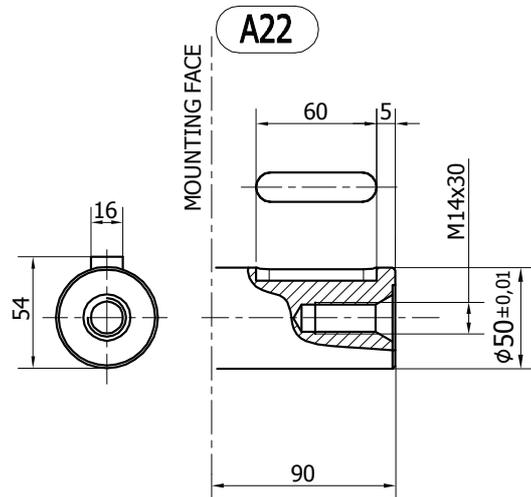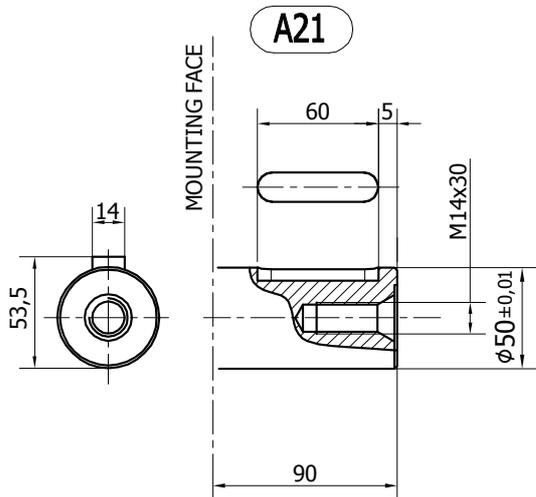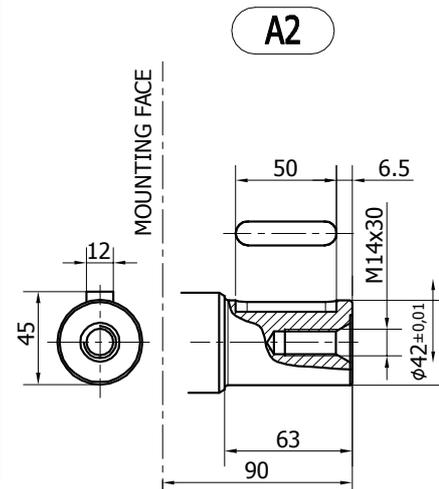

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

INSTALLATION DRAWING

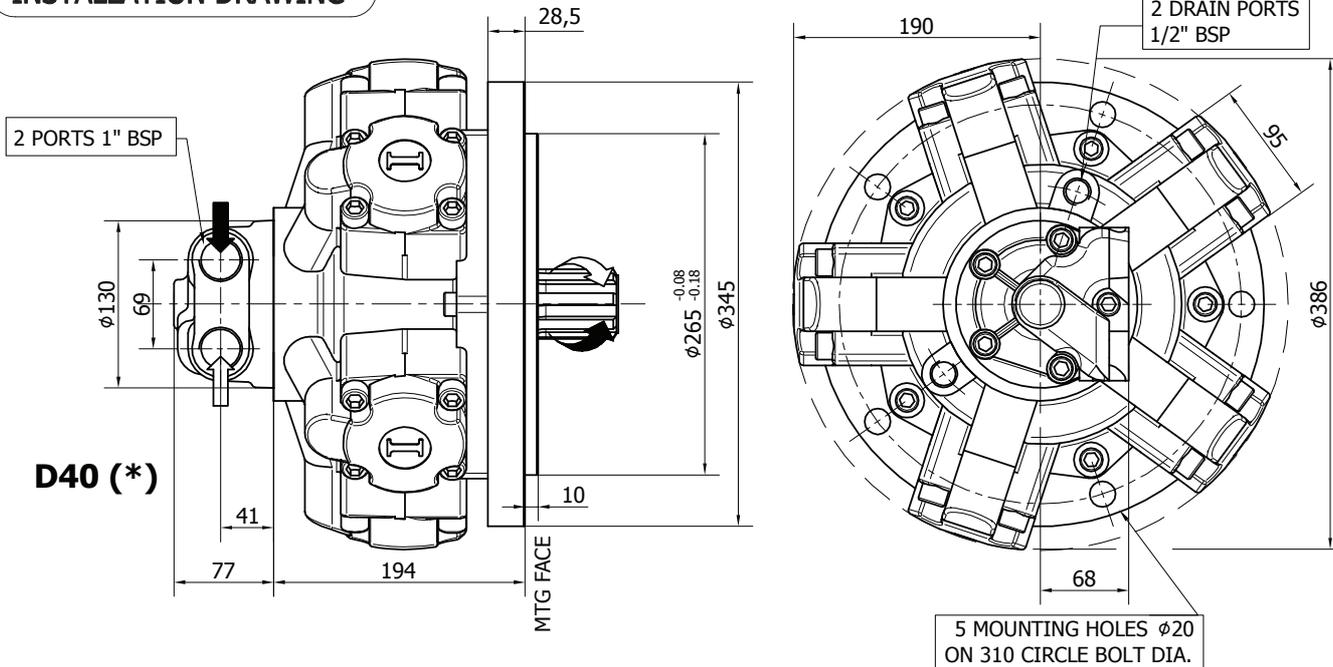

TECHNICAL DATA

		400	450	500	600	650	700
DISPLACEMENT	[cc]	397	452	491	594	660	707
SPECIFIC TORQUE	[Nm/bar]	6.3	7.2	7.8	9.4	10.5	11.2
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250
HYDROSTATIC TEST PRESSURE	[bar]	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	600	600	600	550	500	450
PEAK SPEED (***)	[rpm]	680	680	680	630	580	500
MAX. CONT. POWER (****)	[kW]	45	45	45	45	45	45
MAX. POWER	[kW]	68	68	68	68	68	68
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6
DRY WEIGHT	[kg]	68	68	68	68	68	68
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70

- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.

- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).


- (***) Do not exceed maximum power (see pag. 13).

- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

A0

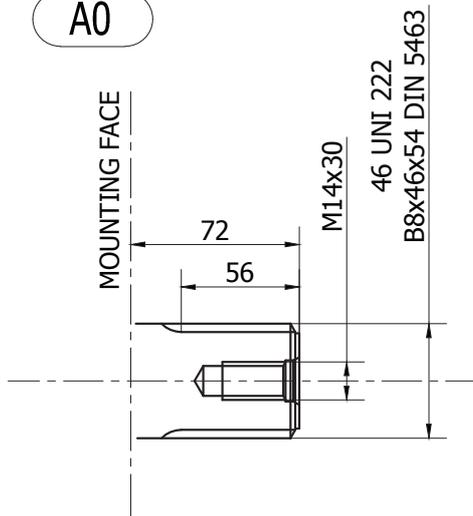


Available spline billet: SB5


A3

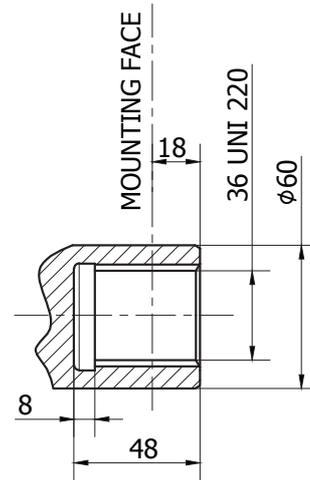

A31

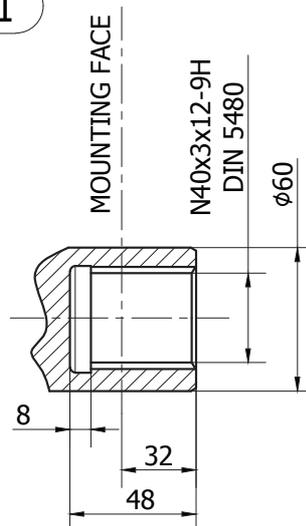

INSTALLATION DRAWING

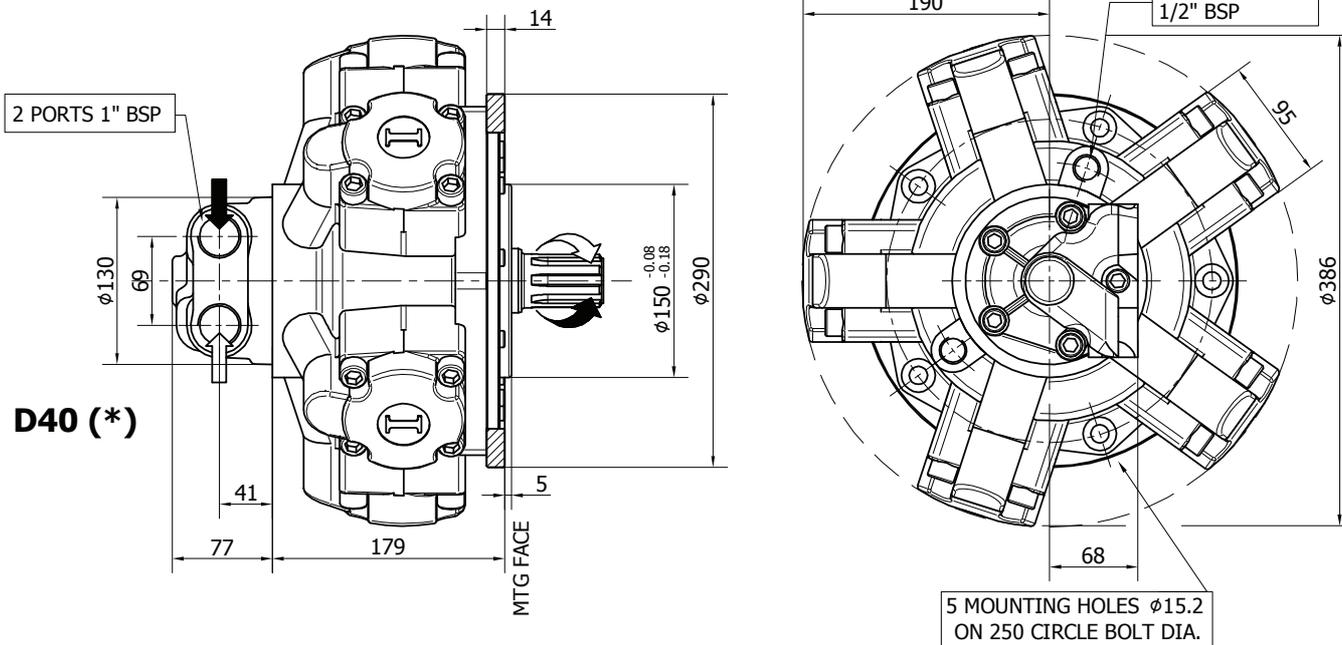


TECHNICAL DATA

		400	450	500	600	650	700
DISPLACEMENT	[cc]	397	452	491	594	660	707
SPECIFIC TORQUE	[Nm/bar]	6.3	7.2	7.8	9.4	10.5	11.2
MAX. CONT. PRESSURE	[bar]	250	250	250	250	250	250
HYDROSTATIC TEST PRES-SURE	[bar]	420	420	420	420	420	420
MAX. CONT. SPEED	[rpm]	600	600	600	550	500	450
PEAK SPEED (***)	[rpm]	680	680	680	630	580	500
MAX. CONT. POWER (****)	[kW]	45	45	45	45	45	45
MAX. POWER	[kW]	68	68	68	68	68	68
MAX. CASE PRESSURE	[bar]	6	6	6	6	6	6
DRY WEIGHT	[kg]	68	68	68	68	68	68
TEMPERATURE RANGE (**)	[°C]	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70	-30÷70


- (*) The standard distributor (D40) is shown. Please refer to distributors section (pag. 176-177) for different distributor interfaces.
- (**) Please refer to the hydraulic fluid recommendations (pag. 10-11).
- (***) Do not exceed maximum power (see pag. 13).
- (****) For motor operation with a continuous duty cycle at maximum continuous power the flushing is usually required. For more information please contact our technical department.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.


SHAFT CONFIGURATIONS

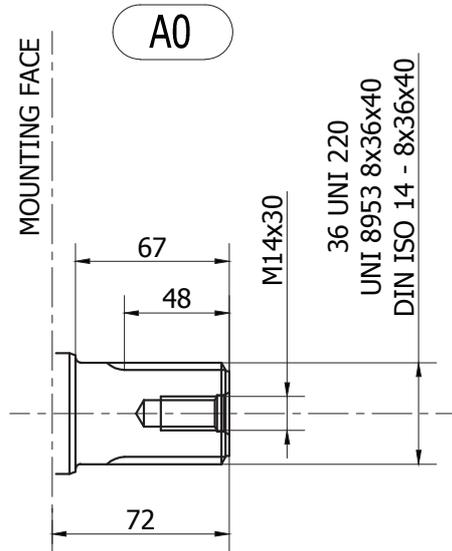

Available spline billet: **SB3**

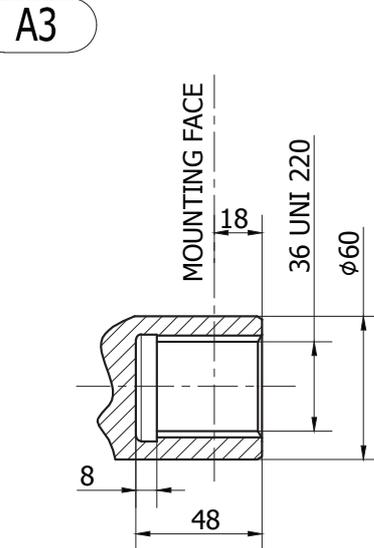


A31

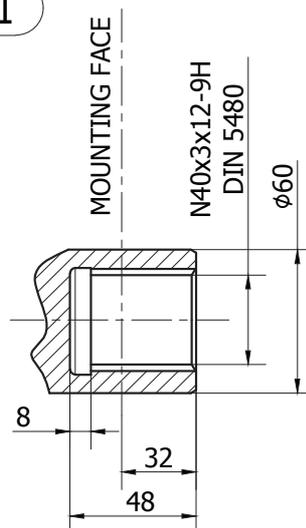


IAM H3 - PERFORMANCE DIAGRAMS

350 cc

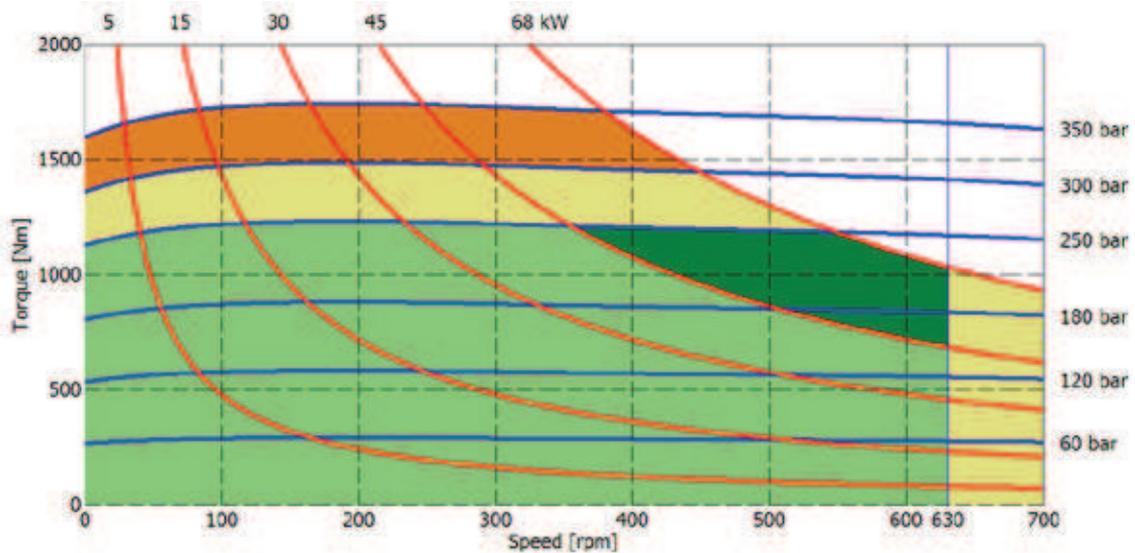

400 cc

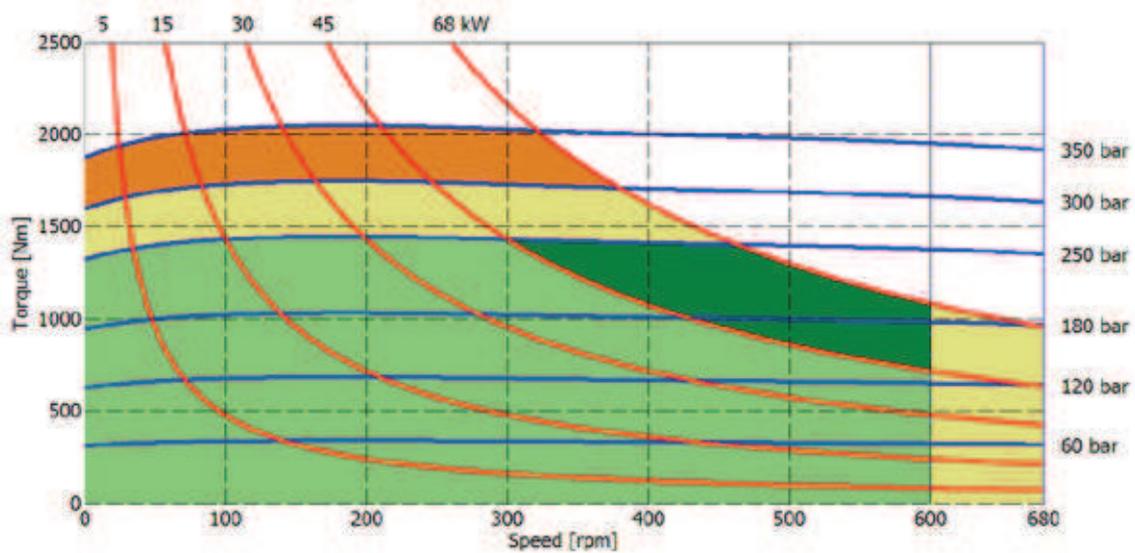


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgrou S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgrou S.r.l. is strictly forbidden.

IAM H3 - PERFORMANCE DIAGRAMS

450 cc

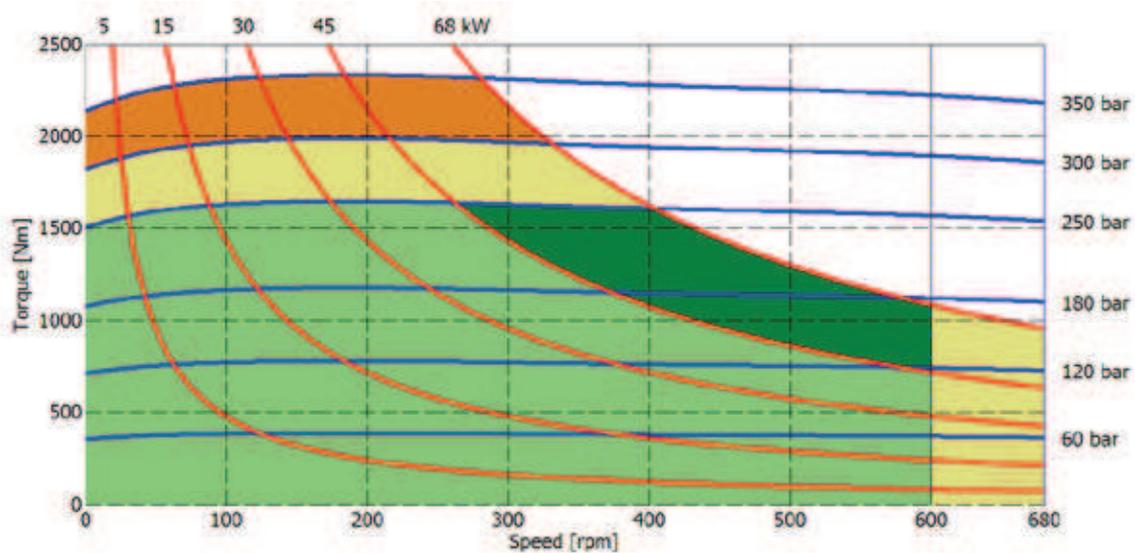

500 cc

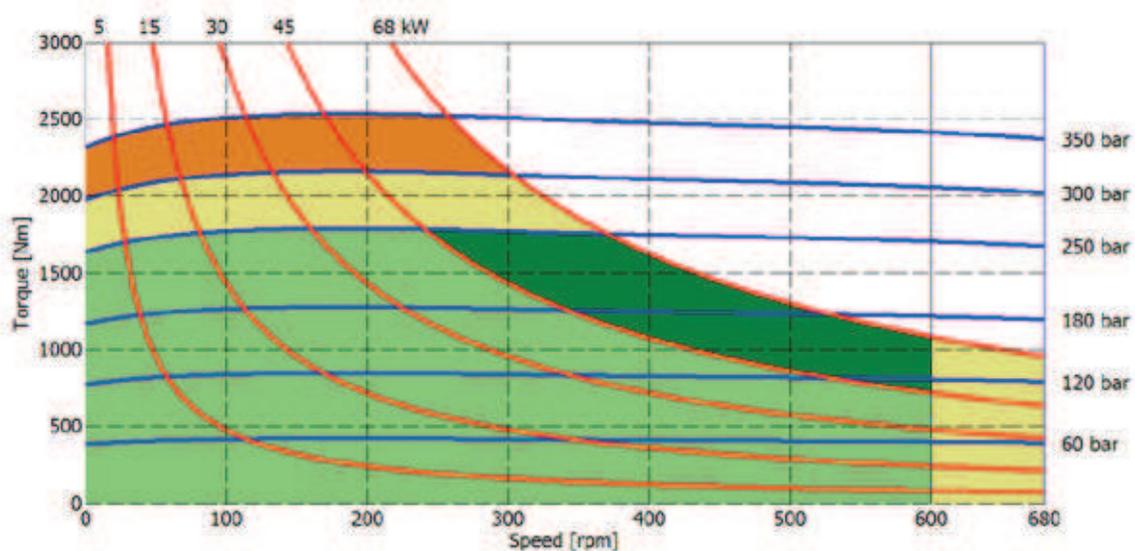


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

IAM H3 - PERFORMANCE DIAGRAMS

600 cc

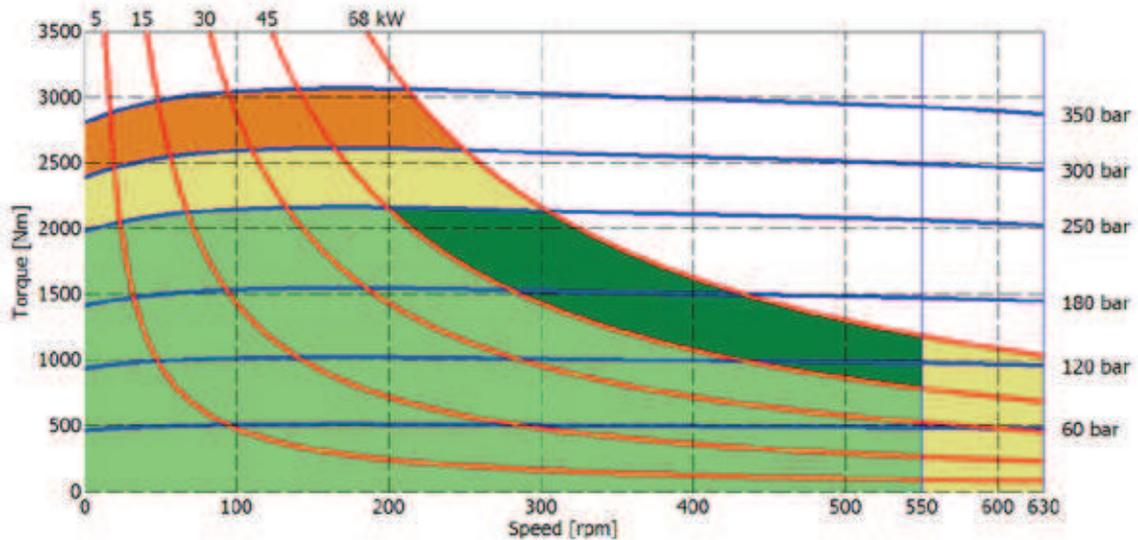

650 cc

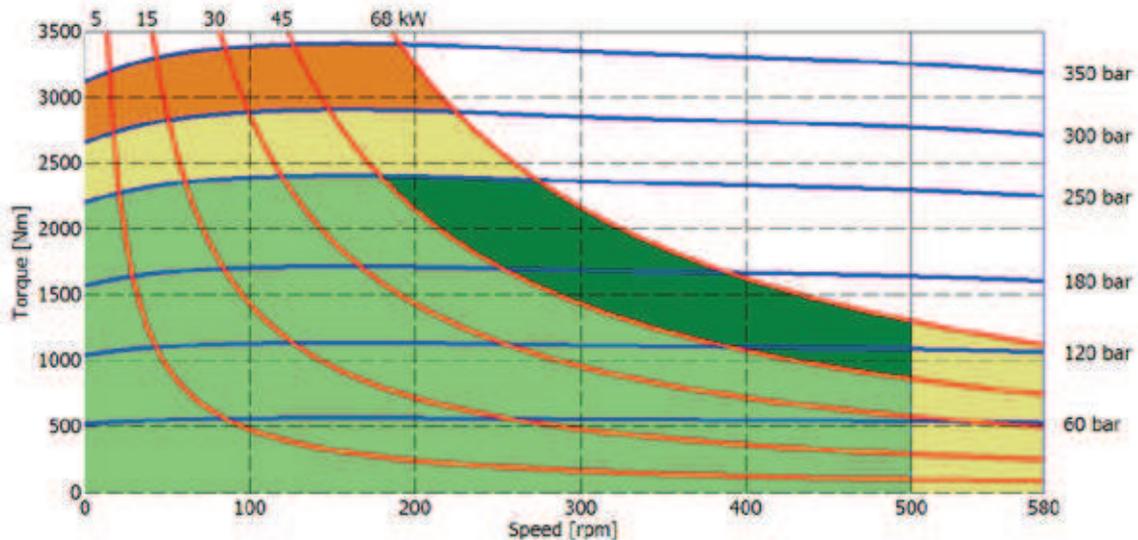


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.


The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. Italgroup S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of Italgroup S.r.l. is strictly forbidden.

IAM H3 - PERFORMANCE DIAGRAMS

700 cc

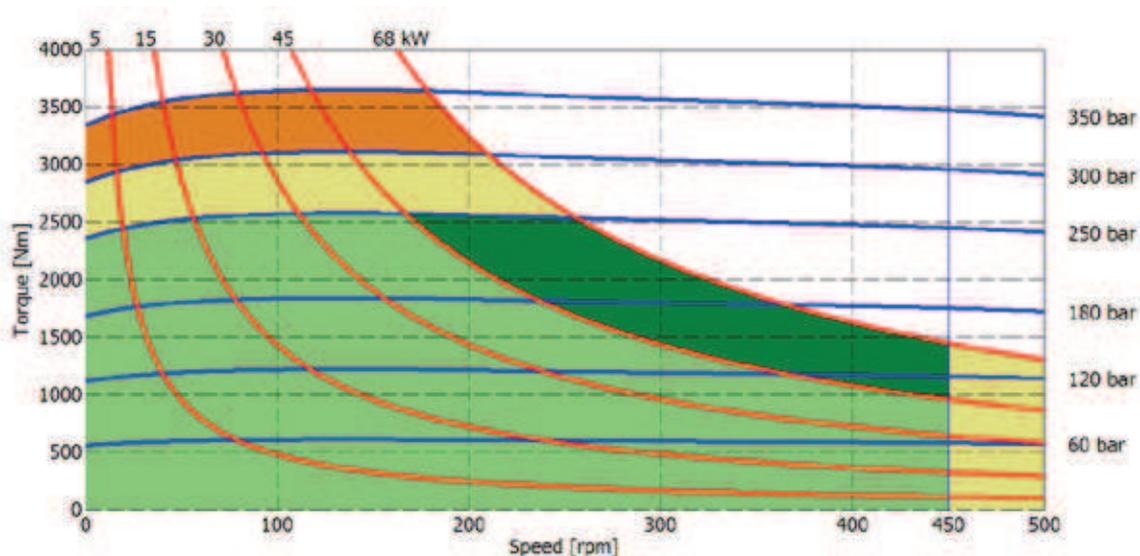

800 cc

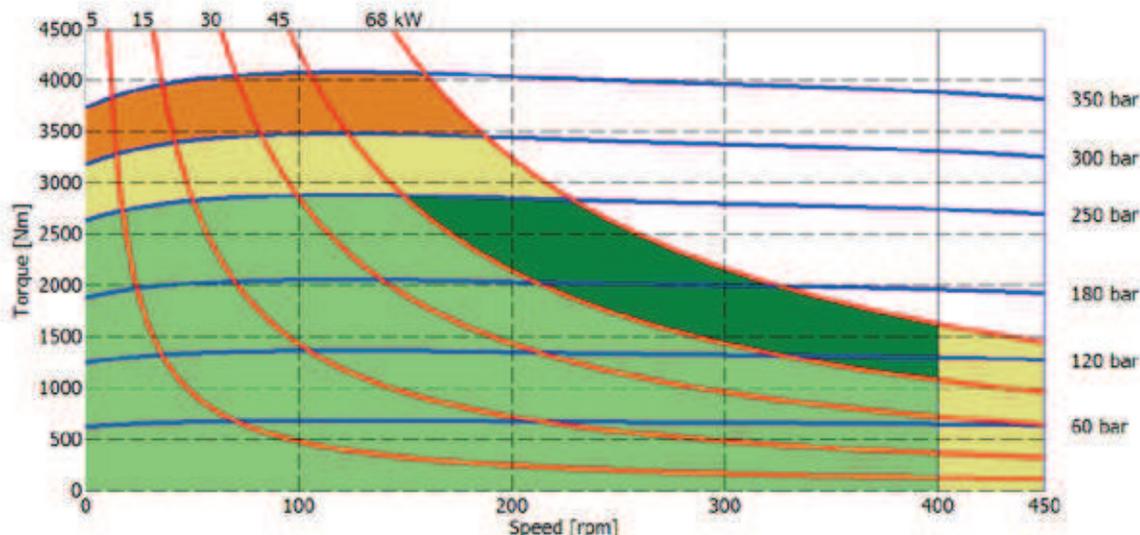


- Continuous operation
- Continuous operation with flushing or intermittent operation (see below for intermittent operation)
- Intermittent operation: permitted for a 15% of duty cycle, for 3 minutes maximum period
- Peak operation: permitted for very short periods (3-5 seconds every 10-15 minutes)

The above diagrams are referring to the hydraulic motor working with a fluid in ideal conditions (viscosity at 40 cSt). In case the working temperature increases and viscosity reach values under the recommended values (see hydraulic fluid recommendations) flushing must be performed or ISO oil grade must be changed. The working temperature must not overcome 70 °C.

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.

BEARING LIFE

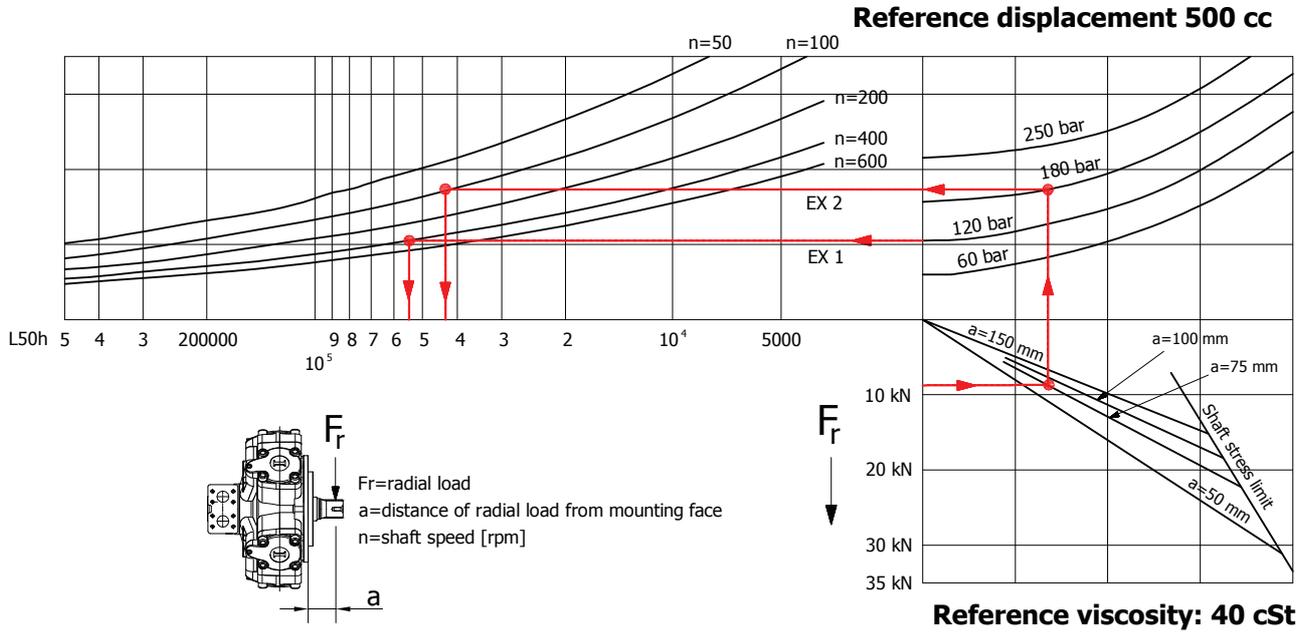


Example:

We suppose (EX1): $p=120$ [bar], $n=400$ [rpm]; we obtain an average lifetime of 53000 [h].

If we suppose (EX2): $F_r=9$ [kN], $a=75$ [mm], $n=100$ [rpm] and $p=180$ [bar] we obtain an average lifetime of 42000 [h].

The above data are referring to the IAM H3 series motors, displacement 500 cc.

IAM H3 - ORDERING CODE

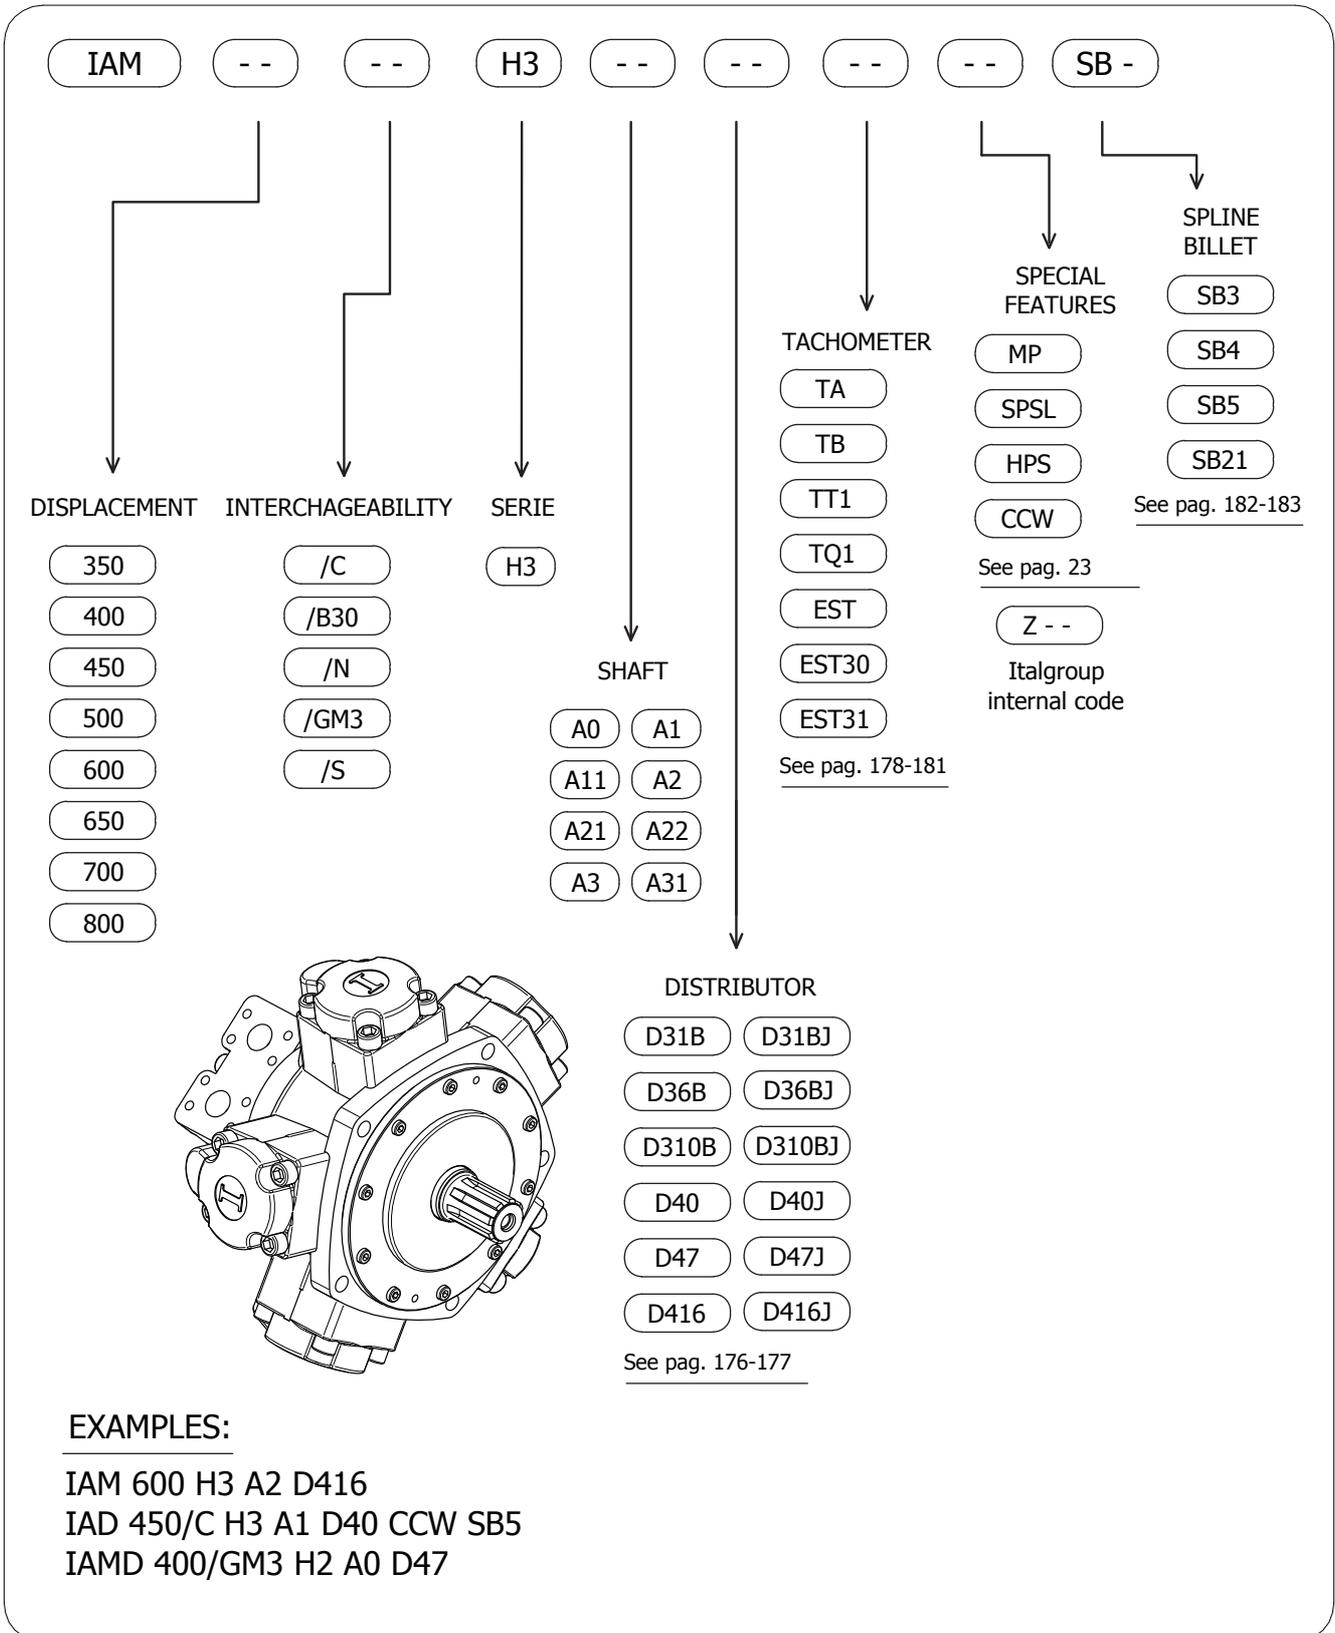

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristics in legal sense. ItalgrouP S.r.l. reserves the right to implement modifications without notice. All partial or total reproduction and copy without written authorization of ItalgrouP S.r.l. is strictly forbidden.