SIZE

FD 4 800-900 D47

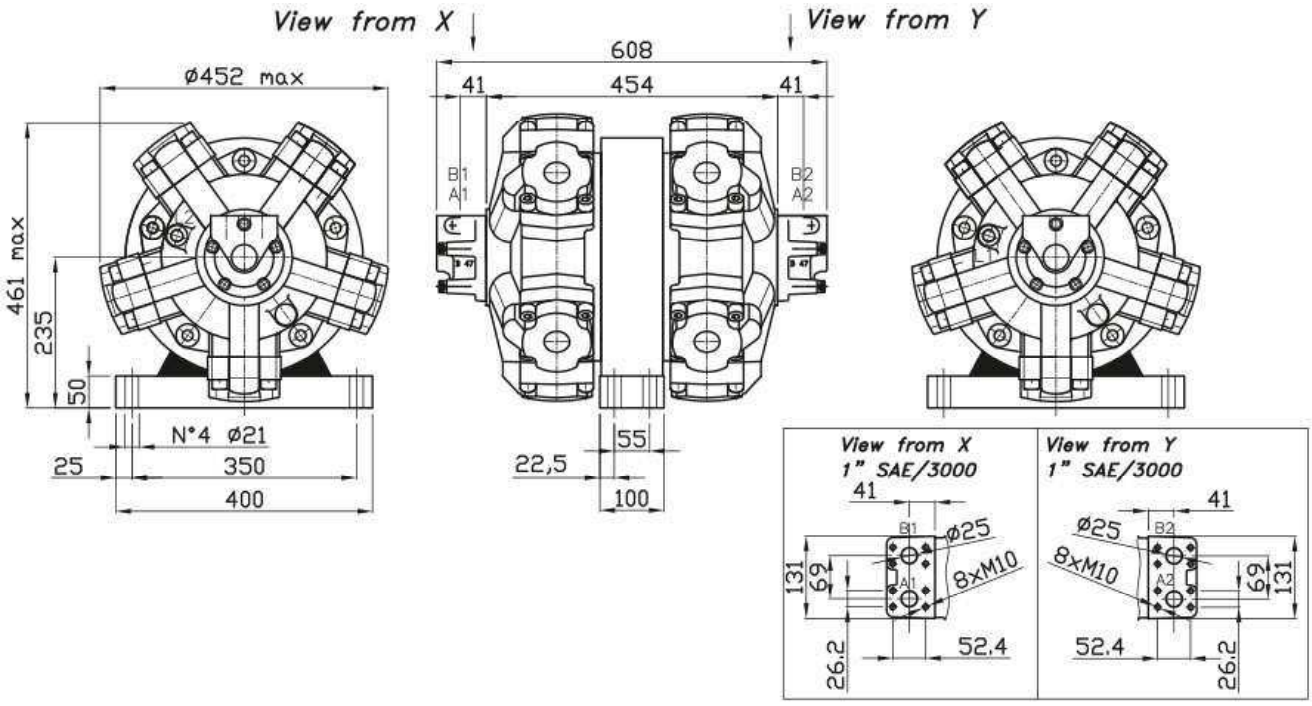

TECHNICAL DATA

FD 4 800-900 D47

MODEL	Flow per section		Displacement per section cc/Rev	Working pressure			Power per section kW
	l/min (cont)	l/min (max)		continuous bar	intermittent bar	maximum bar	
FD 4 800	250	295	792	250	280	350	88
FD 4 900	285	335	904	250	280	350	100

Flow Divider Symbol (with 2 sections)



PORTS DIMENSION	
L1/L2	1/2" BSP

Dry weight	230 kg

Max case pressure	20 bar

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Italgroup reserves the right to implement modifications without notice.

SIZE

FD 4 800-900 D47 VB

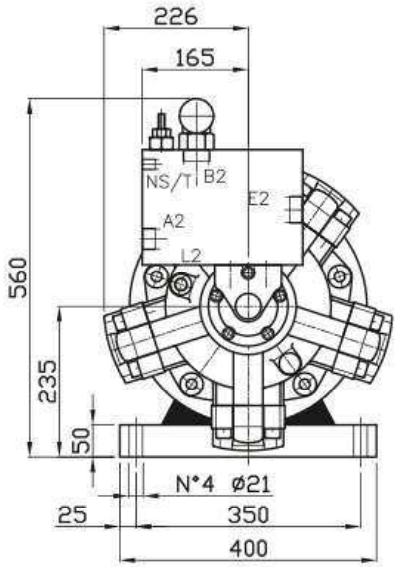

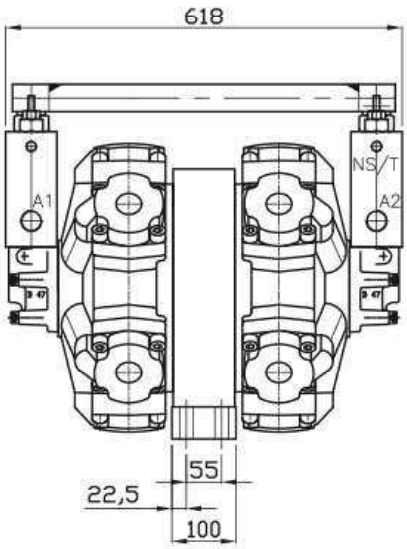

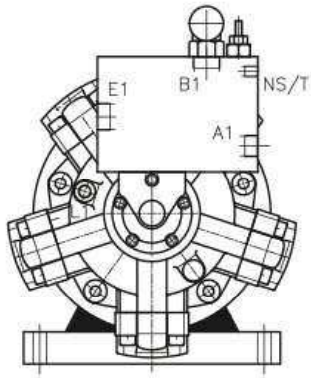

PORTS DIMENSION	
E1/E2	1"1/4 BSP
A1/A2	1"BSP
NS/T	3/8"BSP
L1/L2	1/2"BSP

Max case pressure	6 bar

TECHNICAL DATA

FD 4 800-900 D47 VB

MODEL	Flow per section		Displacement per section cc/Rev	Working pressure			Power per section kW
	l/min (cont)	l/min (max)		continuous bar	intermittent bar	maximum bar	
FD 4 800	250	295	792	250	280	350	88
FD 4 900	285	335	904	250	280	350	100

Flow Divider Symbol (with 2 sections)





RELIEF VALVE DATA	
Rated flow	40 l/min
Adjustable pressure range	5–50 bar
	30–100 bar
	50–220 bar
	80–350 bar

Dry weight	230 kg

Max case pressure	20 bar

The data specified into the catalogue are for product description purpose only and must not be interpreted as warranted characteristic in legal sense. Italgroup reserves the right to implement modifications without notice.